

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



A standard linear barcode is located at the bottom of the page, spanning most of the width. It is used for document tracking and identification.

(43) International Publication Date
23 August 2001 (23.08.2001)

PCT

(10) International Publication Number
WO 01/61646 A1

(51) International Patent Classification⁷: G06K 19/077

Chestnut Hill South, Williamsville, NY 14221 (US)

(21) International Application Number: PCT/US00/34526

dell, NY 14219 (US).

(22) International Filing Date: 20 December 2000 (20.12.2000)

Agent: VANDERHYE, Robert, A.; Nixon & Vanderhye
P.C., Suite 800, 1100 North Glebe Road, Arlington, VA

(25) *Ellipsis Languages* Engelsk

(26) Publication Language: English

AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

(30) Priority Data: 004506.527 12 February 2000 (18.02.2000) 156

HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,

(71) Applicant: MOORE NORTH AMERICA, INC.
[US/US]; 300 Lang Boulevard, Grand Island, NY
14072-1697 (US)

Designated States (regional): ARIPO patent (GH, GM, KE, LS, MN, ML, SD, SL, SI, TZ, UC, UG, ZA, ZW).

(72) **Inventors:** **GRABAU, Robert E.**, 1094 Bowen Drive West, North Tonawanda, NY 14210 (US). **MITCHELL, Nancy, G.**; 2105 Bush Road, Grand Island, NY 14072 (US). **NASH, Thomas, P.**; 20 Deer Ridge, Getzville, NY 14068 (US). **PALMER, Eric, V.**; 64 Jasper Drive, Amherst, NY 14226 (US). **SHIPSTON, Adele, C.**; 153


patent (AM, AZ, BY, KG, KZ, ML, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

[Continued on next page]

(54) Title: BJT MANUFACTURING CONCEPTS

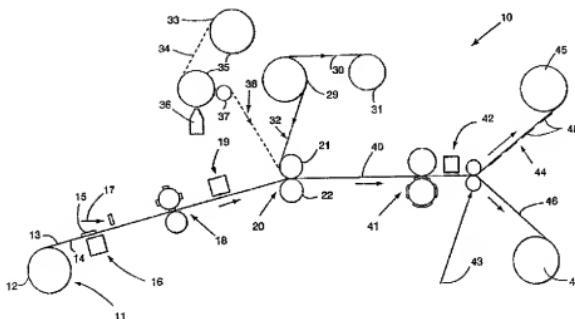

(57) Abstract: Radio frequency identification labels are made in a high speed and effective manner in a variety of different ways utilizing a number of different sources of RFID inlets, each inlet including an antenna and a chip. A plurality of webs are matched together and RFID labels are die cut from the webs, to produce lined RFID labels. Alternatively unlined RFID labels are produced from a composite web with a release material on one face and pressure sensitive adhesive on the other, the labels formed by perforations in the web.

WO 01/61646 A1